


TP-1000 BELLS and FARC


Mains bells powered by TP1000

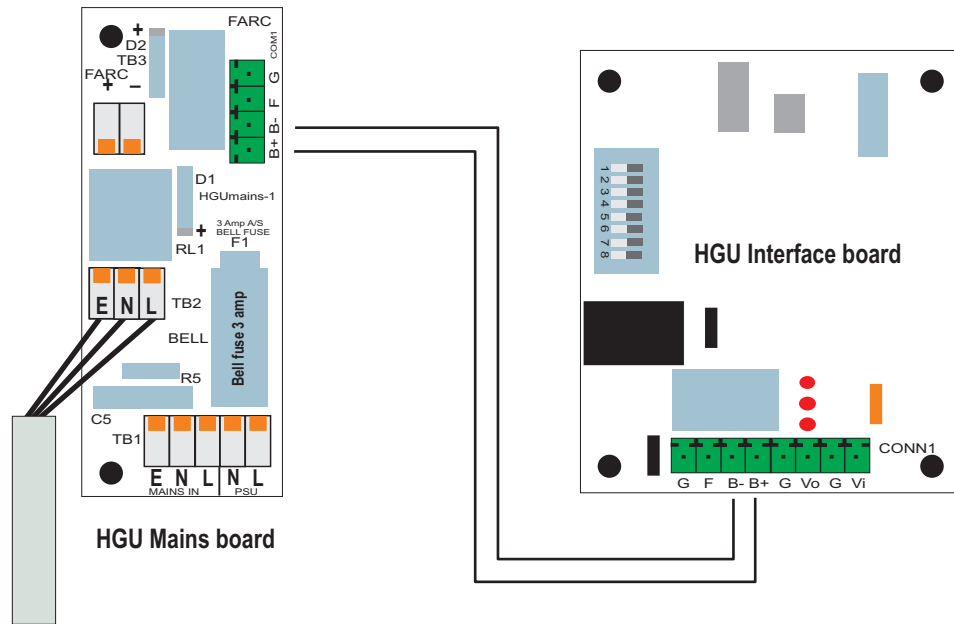

Cable to mains bell

The HGU mains board bell output is 240 v ac with a maximum current of 3amps (fused at 3 amp). A standard mains snubber is fitted on the board which may be removed (remove R5) if a small siren is fitted and the motor is turning all the time .

Fire alarm input from fire alarm

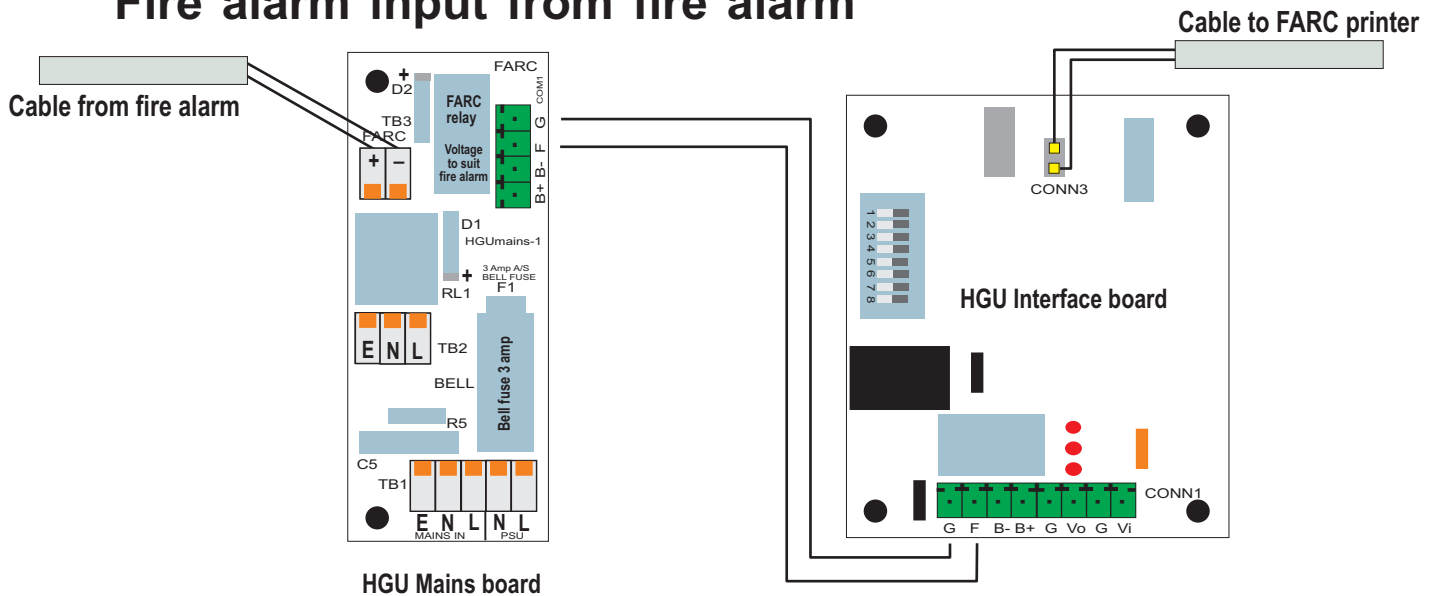

The input from the customers fire alarm is connected to Tb3 + and -, this is a polarized input and must be connected with the correct polarity. A FARC relay is fitted with the correct voltage coil to suit the fire alarm output, 5, 12 or 24 volts DC. The FARC printer is connected to the TP1000 interface board CONN3.